

DESCRIPTION

SR/NSSD are expansion boxes for slot diffusers NS/SD. They stabilize the airflow and ensure uniform air supply to the diffuser. Expansion boxes connect diffusers with ventilation installation. They are made of zinc-coated sheet, joint by non-welded Click-Clock connection.


Expansion boxes can be connected to the ventilation installation through the side or top.

Boxes can be thermally and acoustically insulated from the inside by K-Flex rubber mat.

Upon customer's request we can make other types of expansion boxes accordingly to provided drawings.

ORDER REFERENCE

SR / NSSD - 1000/13 - PZ - I

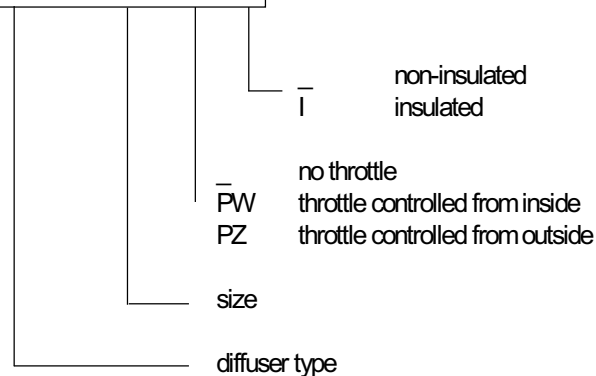

STANDARD SIZES

	1000/13	1000/26	1500/20	1500/39	2000/26	2000/52
A [mm]	80	150	80	150	80	150
L [mm]	1000	1000	1500	1500	2000	2000
H [mm]	225	260	225	260	225	260
Ød [mm]	1 x 123	1 x 158	1 x 123	1 x 158	2 x 123	2 x 158
i [mm]	115	130	115	130	115	130

expansion boxes for diffusers NS/SD

INSTALLATION

Expansion boxes SR/NSSD are designed for installation in the underslung ceiling. Prepare an installation hole of a size of CxD for the chosen diffuser. Put the expansion in, accordingly to Fig. 1. Slide the front panel of the diffuser onto the box and fix it on the sides with screws or rivets. Pull the box up and hang on the roof using appropriate hangers (bars, pins...) or installation slings (Fig. 2).

Upon customer's request, boxes can be equipped with factory slings.

INSTALATION IN THE ROOF

